


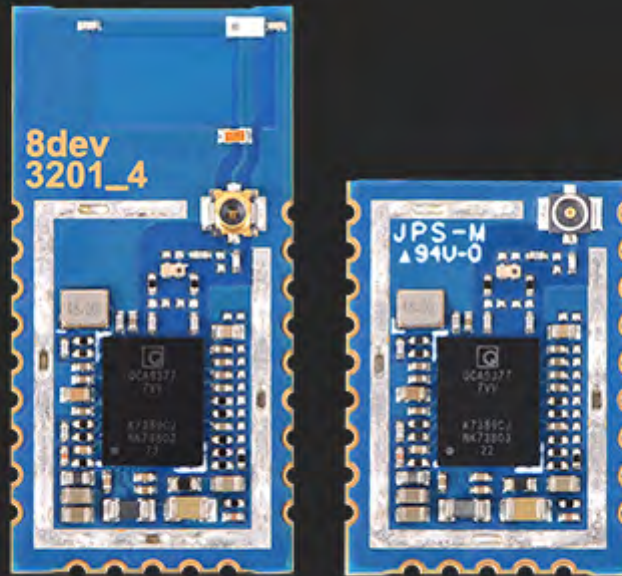

BLUE bean is IEEE 802.11b/g/n/a/ac Wave2 dual-band wireless LAN and Bluetooth 5.0 USB module optimised for small size and low power consumption.

It is based on Qualcomm QCA9377-7 chipset. Has an integrated dual-band (2.4 and 5 GHz) 1x1 802.11ac Wave2 WiFi (supporting MU-MIMO) and Bluetooth® 5.0 transceivers and combined in to very small form factor (17 x 12 mm with RF connector and 24 x 12mm with integrated antenna).

The radio module supports advanced power saving techniques. Bluetooth supports both Class1 and Class2 transmissions and advanced coexistence mechanisms allow it to work seamlessly with Wi-Fi ensuring good quality and high performance.

BLUE bean software drivers are available for Linux operating system.


Quick specs

- 802.11a/b/g/n/ac, 2.4 and 5 GHz, 1x1 SISO, 433 Mbps data rate, up to 20 dBm output power;
- 20/40/80 MHz channel size support;
- MU-MIMO;
- Bluetooth v5.0, BLE, ANT+ and backwards compatibility with BT v1.x and BT v2.x + enhanced data rate;
- Connectorized (Murata HSC type connector: MM4829-2702RB0) or an integrated dual-band antenna version;
- Linux driver available;
- Based on QCA9377-7 chipset;
- Industrial temperature range -40 to +85 C°;
- Very small form factor (17 by 12 mm without antenna or 24 by 12 mm with antenna);
- Surface mount, dual-side design;
- Available interfaces - Bluetooth USB 1.1, WLAN USB 2.0.



Table of Contents

1. Block diagram	3
2. Pinout Information (with antenna/ without antenna)	4
3. Electrical characteristics	6
3.1 Power consumption	6
3.2. Power ratings	6
3.3. Operating conditions	6
3.4. Software	6
3.5. Power supply	6
4. Radio characteristics	7
5. Mechanical characteristics	8
5.1. Module dimensions (with antenna/ without antenna)	8
5.2. PCB footprint (same for RED bean C and RED bean A modules)	9
5.3. Soldering paste footprint (same for RED bean C and RED bean A modules)	9
5.4. Integration with a Motherboard	9
6. Reflow profile recommendations	10
6.1. Reflow profile parameters	10
6.2. Reflow profile	10
7. Laminate Conditions	11
7.1. Bow and Twist	11
8. Development kit	12
8.1. Development kit interfaces	12
9. Packaging and ordering info	13
9.1. Tape&Reel packaging	14
9.2. Ordering part numbers	14
10. Document Revision History	15

1. Block diagram

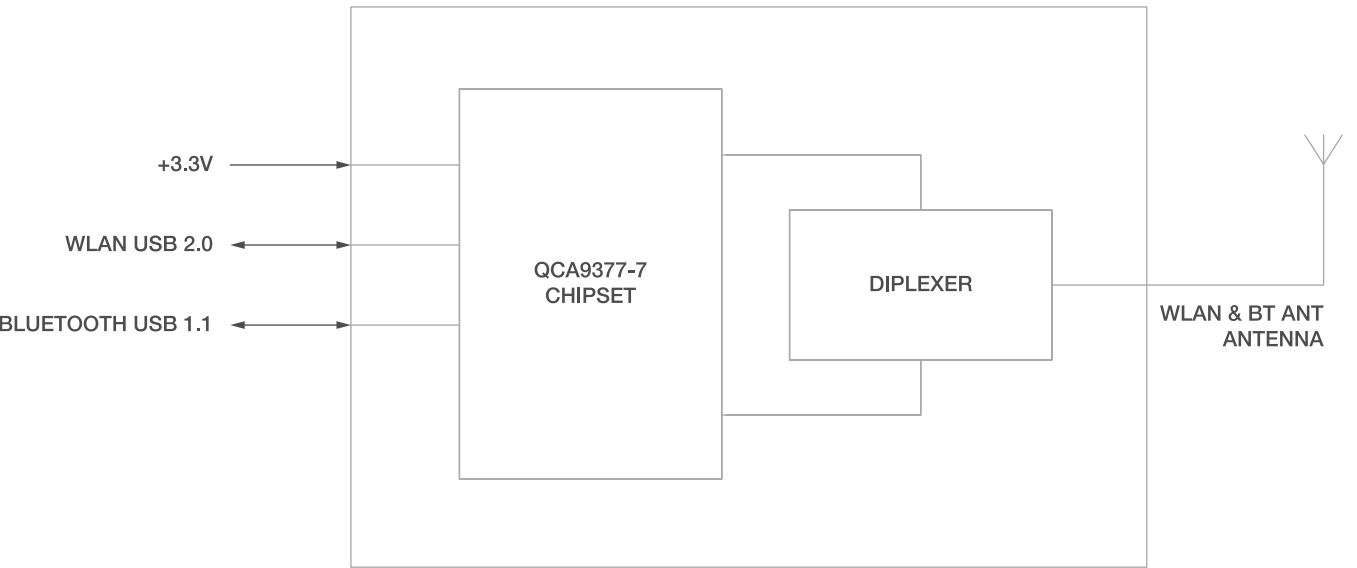

2. Pinout Information (with antenna/ without antenna)

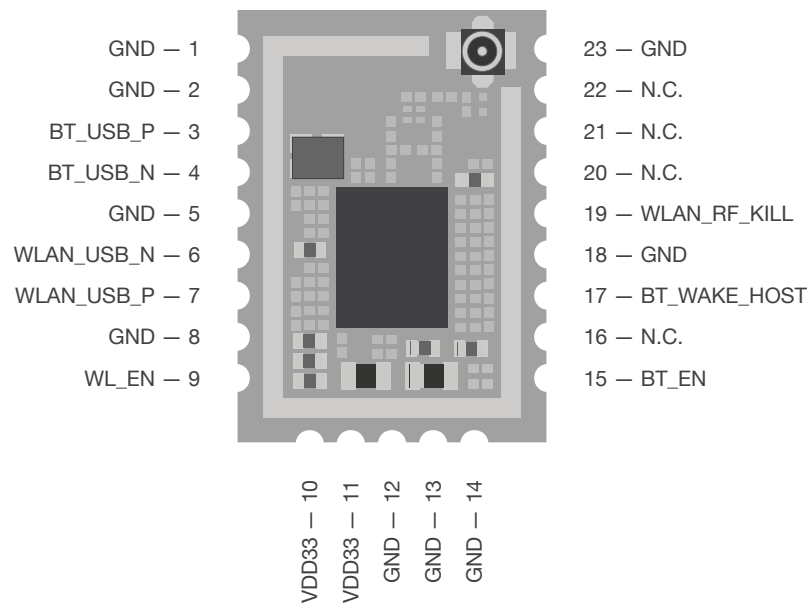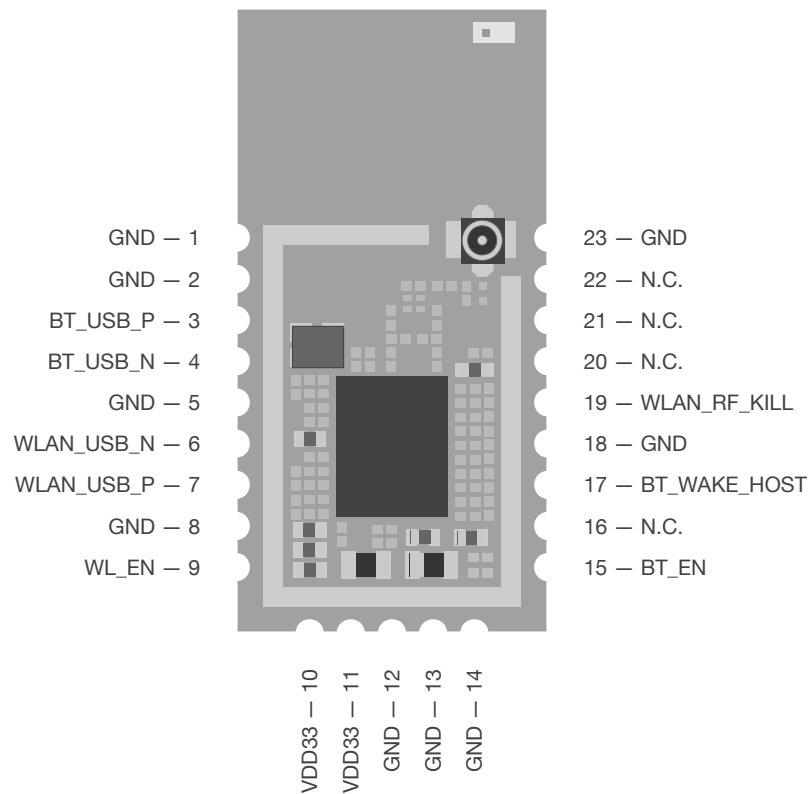

Pin	Name	I/O	Description
1	GND	-	Ground connection
2	GND	-	Ground connection
3	BT_USB_P	IO	Bluetooth USB data +
4	BT_USB_N	IO	Bluetooth USB data -
5	GND	-	Ground connection
6	WLAN_USB_N	IO	WLAN USB data -
7	WLAN_USB_P	IO	WLAN USB data +
8	GND	-	Ground connection
9	WL_EN	PU	WLAN enable. Active high.
10	VDD33	PI	+3V3 digital power supply
11	VDD33	PI	+3V3 digital power supply
12	GND	-	Ground connection
13	GND	-	Ground connection
14	GND	-	Ground connection
15	BT_EN	PU	Bluetooth enable. Active high.
16	N.C.	-	Not connected
17	BT_WAKE_HOST	O	Signal indicating that Bluetooth interface requires requires attention. High - host must wake up and remain awake. Low - host device may sleep.
18	GND	-	Ground connection
19	WLAN_RF_KILL_L	PU	Turn off WLAN RF analog and front-end. Active low.
20	N.C	-	Not connected
21	N.C	-	Not connected
22	N.C	-	Not connected
23	GND	-	Ground connection

PU - Input signals with weak internal pull-up, to prevent signals from floating when left open

PI - Power input

IO - digital bi-directional signal

O - digital output

3. Electrical characteristics

3.1 POWER CONSUMPTION

Wi-Fi mode	USB 2.0 mA	Bluetooth mode	USB 1.1 mA
Standby (deep sleep)	0.24	Continuous Rx burst	22.5
2G tx99 11b 1Mbps	356	Continuous Tx Class 2 (+4 dBm)	38.5
2G tx99 11n HT20 MCS7	326	Continuous Tx Class 2 (+12.5 dBm)	64.5
5G tx99 11n HT20 MCS0	487	1.28 sec page scan (non-interlaced)	0.36
5G tx99 11n HT20 MCS7	422	1.28 sec LE ADV	0.23
5G tx99 11ac VHT80 MCS9	421	1.28 sec sniff as master	0.22
		1.28 sec sniff as slave	0.27

3.2. POWER RATINGS

Parameter	Units	Min	Nominal	Max
Supply Voltage (+3V3)	V	3.135	3.3	3.465

3.3. OPERATING CONDITIONS

The module can operate in a wide temperature range and different conditions depending on the enclosure. The following guidelines guarantee that it will work correctly.

Parameter	Units	Min	Max
Working temperature	°C	-40	85
Storage temperature	°C	-40	90
Humidity	%RH	10	90
Storage humidity	%RH	5	90

3.4. SOFTWARE

Drivers for BLUE bean USB module (based on QCA9377-7) are available for Linux operating system.

3.5. POWER SUPPLY

It is recommended to use pin 10 and pin 11 to give power supply to the module.

4. Radio characteristics

2.4 GHZ 802.11AC (20 MHZ)

Data rate (Mbps)	7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	86.7
Sensitivity (dBm)	-92	-89	-87	-83	-80	-76	-75	-73	-69
Output power (dBm)	18	18	18	18	18	16	16	16	15

2.4 GHZ 802.11AC (40 MHZ)

Data rate (Mbps)	15	30	45	60	90	120	135	150	180	200
Sensitivity (dBm)	-88	-86	-84	-81	-77	-73	-72	-70	-66	-64
Output power (dBm)	17	17	17	17	17	15	15	15	13	13

5 GHZ 802.11AC (20 MHZ)

Data rate (Mbps)	7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	86.7
Sensitivity (dBm)	-91	-87	-85	-82	-78	-74	-73	-71	-67
Output power (dBm)	15	15	15	14	14	12	11	10	10

5 GHZ 802.11AC (40 MHZ)

Data rate (Mbps)	15	30	45	60	90	120	135	150	180	200
Sensitivity (dBm)	-87	-85	-82	-79	-76	-72	-70	-68	-65	-63
Output power (dBm)	14	14	14	13	13	12	11	9	9	8

5 GHz 802.11AC (80 MHz)


Data rate (Mbps)	32.5	65	97.5	130	195	260	292.5	325	390	433.3
Sensitivity (dBm)	-84	-81	-78	-76	-72	-68	-67	-65	-61	-59
Output power (dBm)	13	13	13	12	12	11	11	9	9	8

BLUETOOTH


Frequency range	2.402 - 2.480 GHz
Supported modes	BT and BLE
Max TX power	8 dBm (4 dBm BLE)
RX sensitivity (BER >= 0.1%)	-95 dBm (-99 dBm BLE)

5. Mechanical characteristics


5.1. MODULE DIMENSIONS (WITH ANTENNA/ WITHOUT ANTENNA)

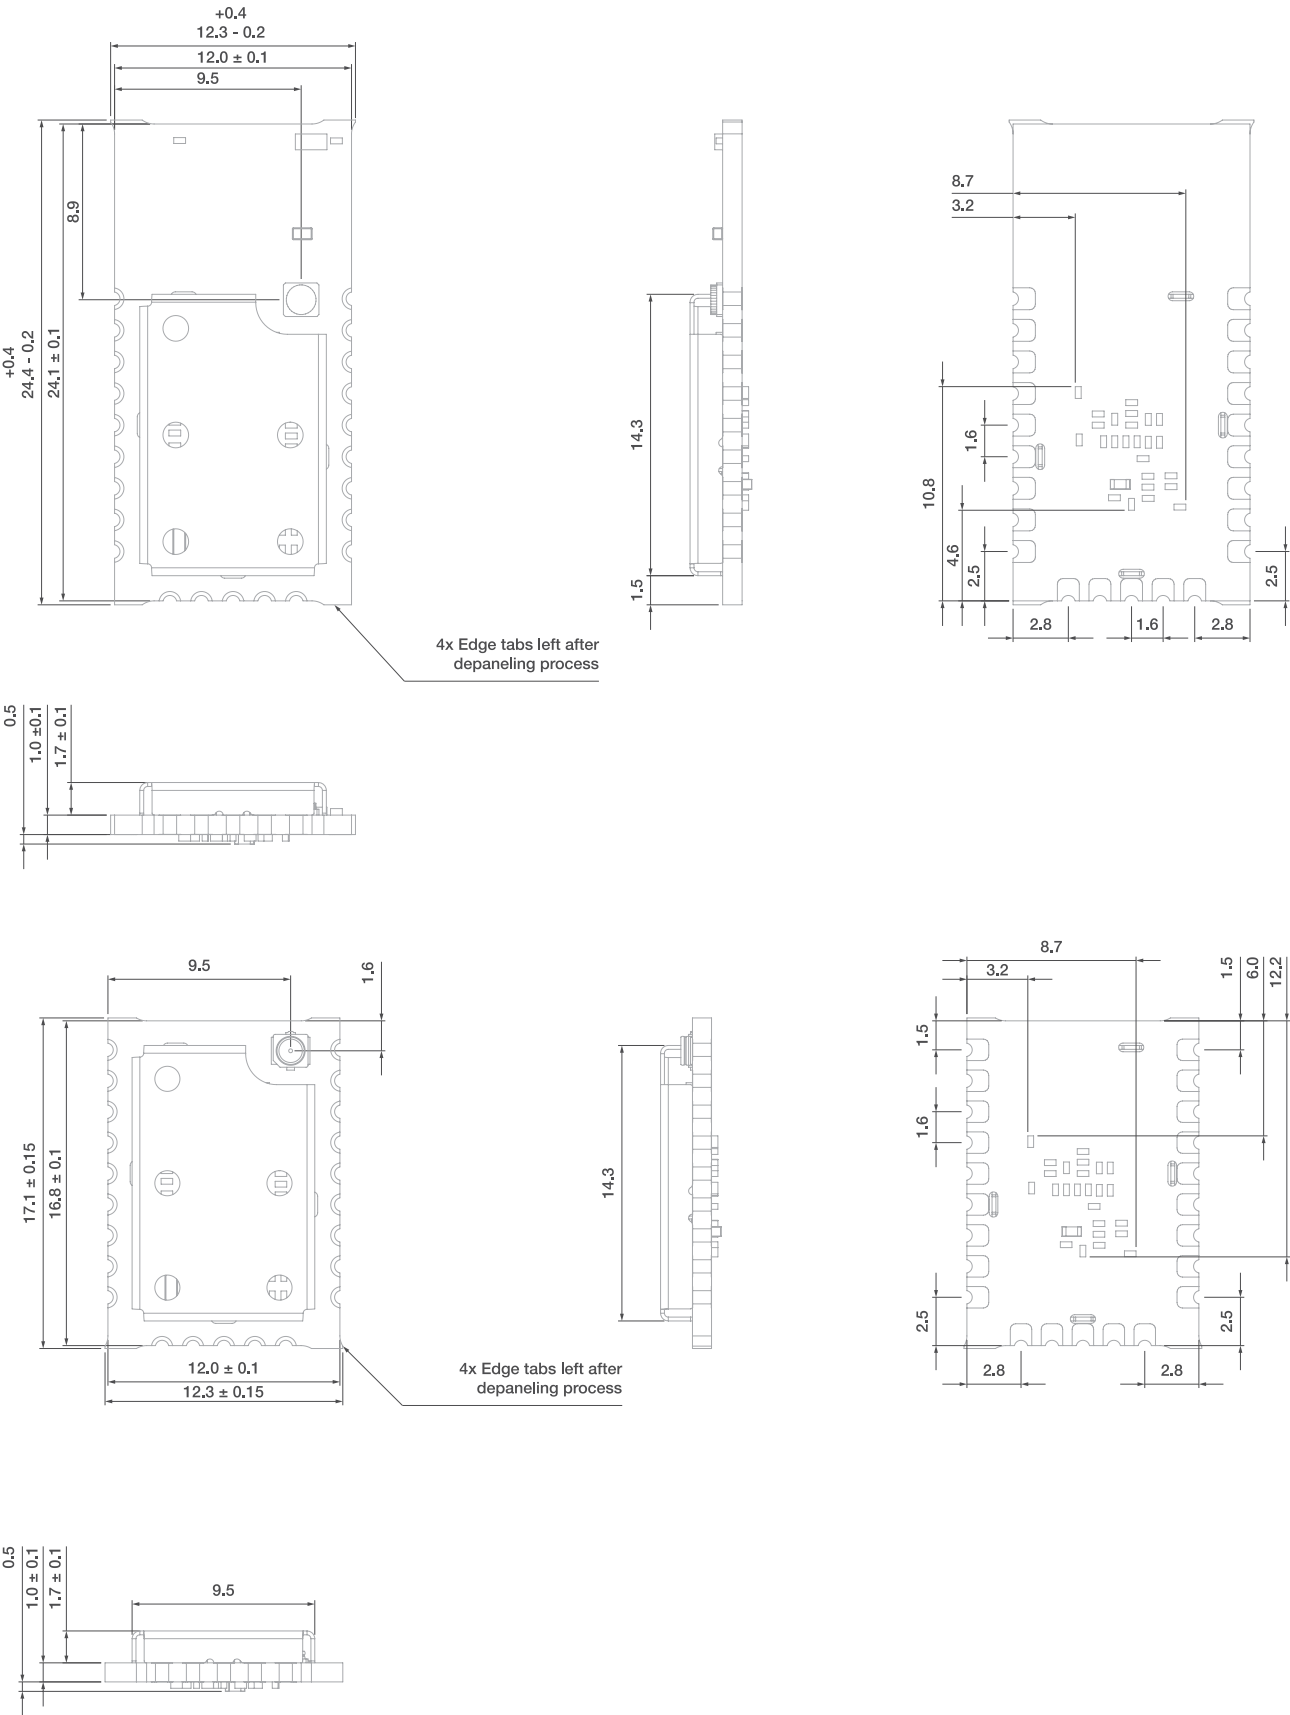

5.2. PCB FOOTPRINT (SAME FOR RED BEAN C AND RED BEAN A MODULES)

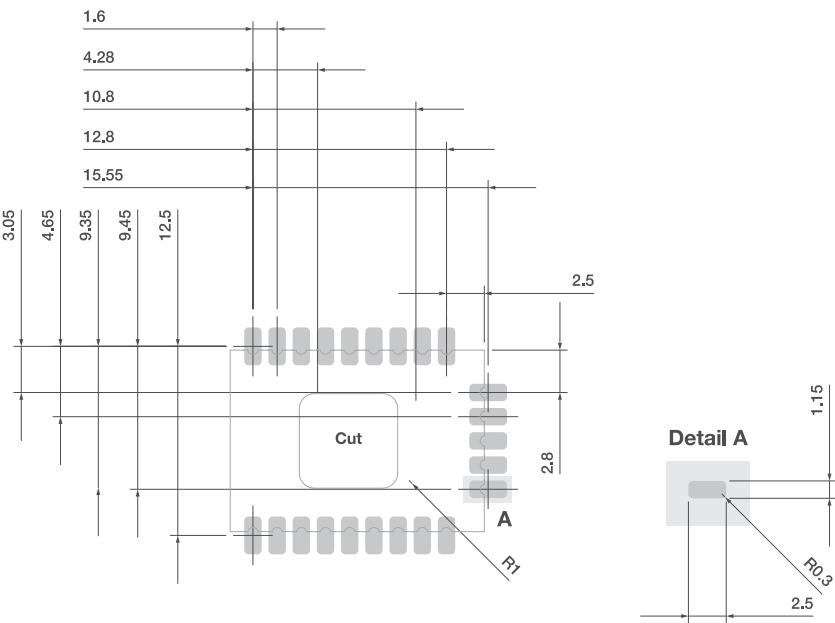


5.3. SOLDERING PASTE FOOTPRINT (SAME FOR RED BEAN C AND RED BEAN A MODULES)

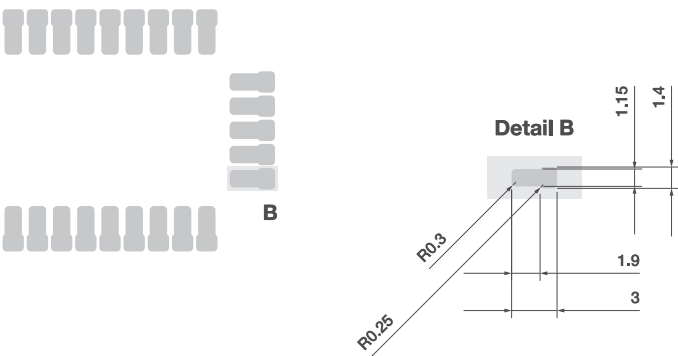

5.4. INTEGRATION WITH A MOTHERBOARD

To ensure optimum performance, users must take care in the design to place the antenna part away from the motherboard

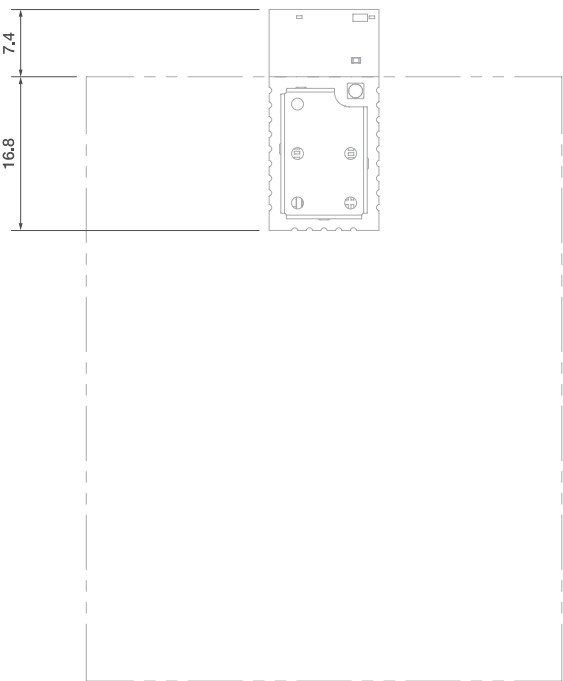


6. Reflow profile recommendations

6.1. REFLOW PROFILE PARAMETERS

Reflow profile recommendation	
Ramp up rate	3°C/second max
Maximum time maintained above 217°C	120 seconds
Peak temperature	250°C
Maximum time within 5°C of peak temperature	20 seconds
Ramp down rate	6°C/second max

6.2. REFLOW PROFILE

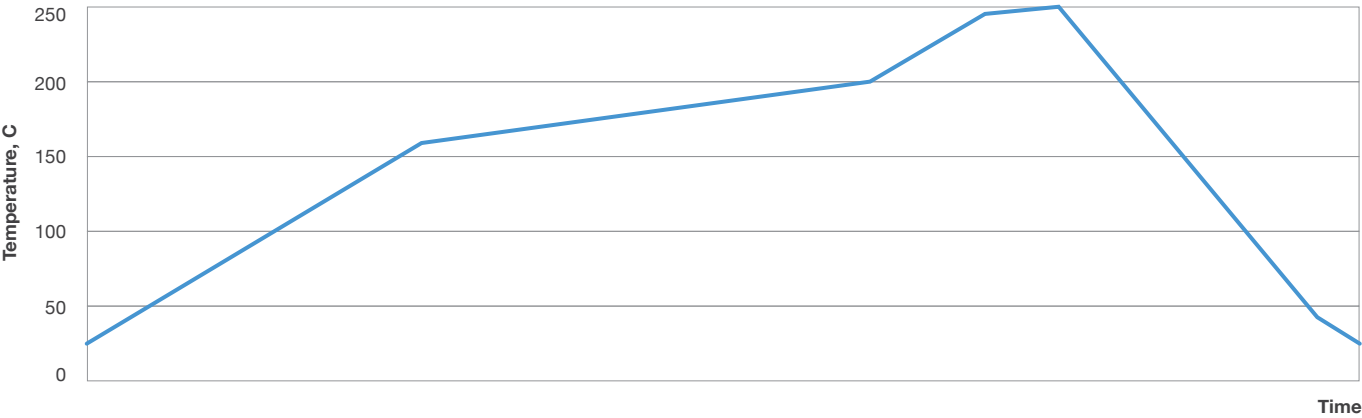

7. Laminate Conditions

7.1. BOW AND TWIST

8devices modules are manufactured according to the standard IPC-A-610 Norm Class 2.

Standard states: “Bow/twist after solder should not exceed 1.5% for through-hole and 0.75% for surface mount printed board applications”.

According to this statement, BLUE bean module can be bowed and twisted up to 0.183mm.


To avoid negative effects of bow and twist we recommend to increase the paste thickness for the module pads to achieve better co-planarity.

FIGURE 7-1. EXAMPLE OF BOW AND TWIST



8. Development kit

8.1. DEVELOPMENT KIT INTERFACES

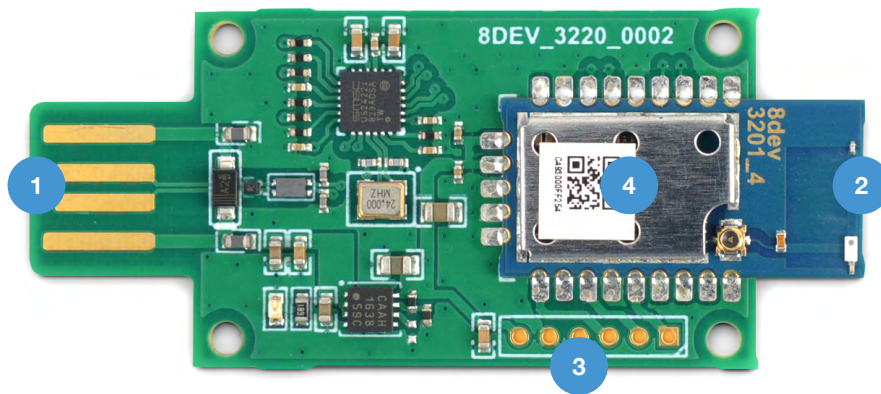

- 1 - USB Wi-Fi and Bluetooth
- 2 - Dual-band ceramic antenna
- 3 - Turn on/off WLAN and Bluetooth
- 4 - BLUE bean A module

9. Packaging and ordering info

BLUE bean modules are packed into vacuum sealed trays. A tray of BLUE-BEAN-A fits 60 modules and a tray of BLUE-BEAN-C fits 78 modules. Every 5 trays are vacuum sealed packaging 300 of BLUE-BEAN-A modules or 390 of BLUE-BEAN-C modules.

FIGURE 9-1. BLUE-BEAN-A TRAY


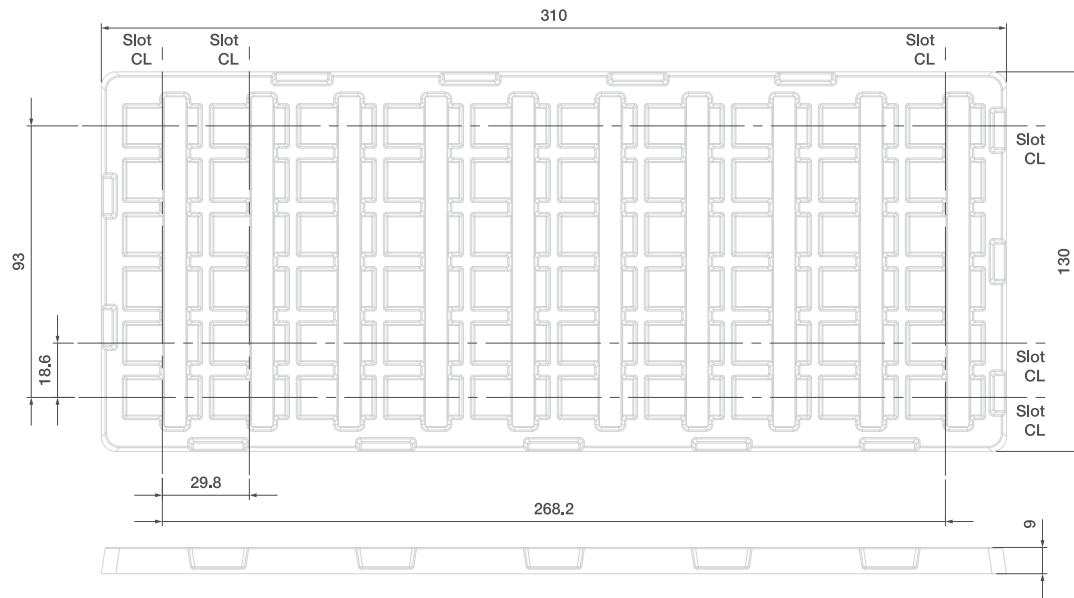


FIGURE 9-2. BLUE-BEAN-C TRAY

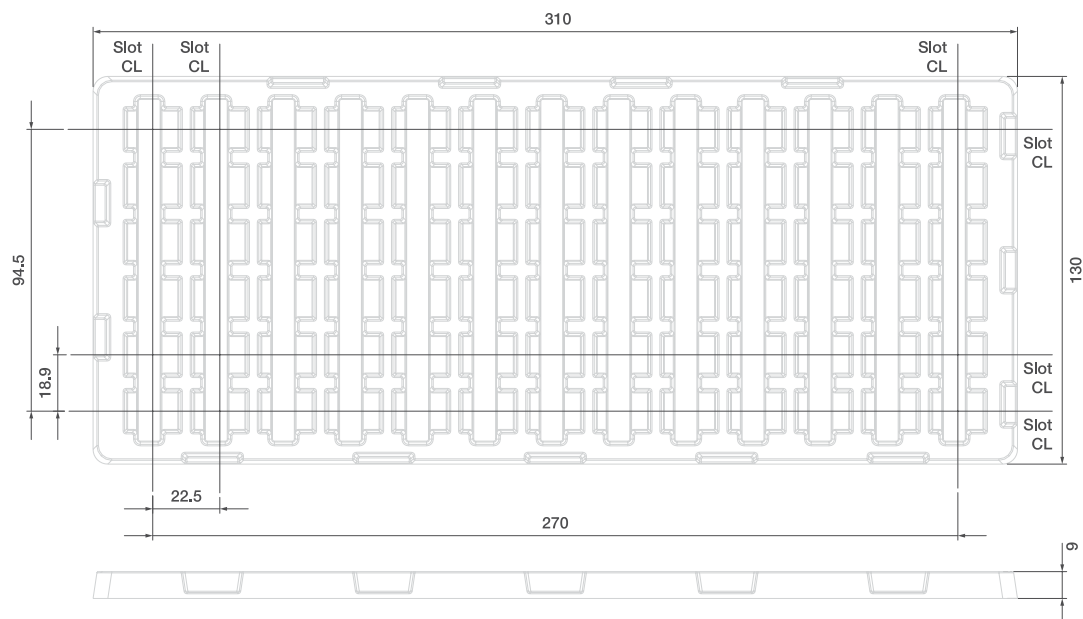

9.1. TAPE&REEL PACKAGING


When modules are packed into Tape&Reel, each reel contains 1000 modules.

There are 5 reels in one standard packing box.

First 5 slots of every tape are empty, beginning of the tape in the drawing is on the left side.

Note: Tape&Reel packaging for Antenna version.

FIGURE 9.1-1 TAPE&REEL PACKAGING

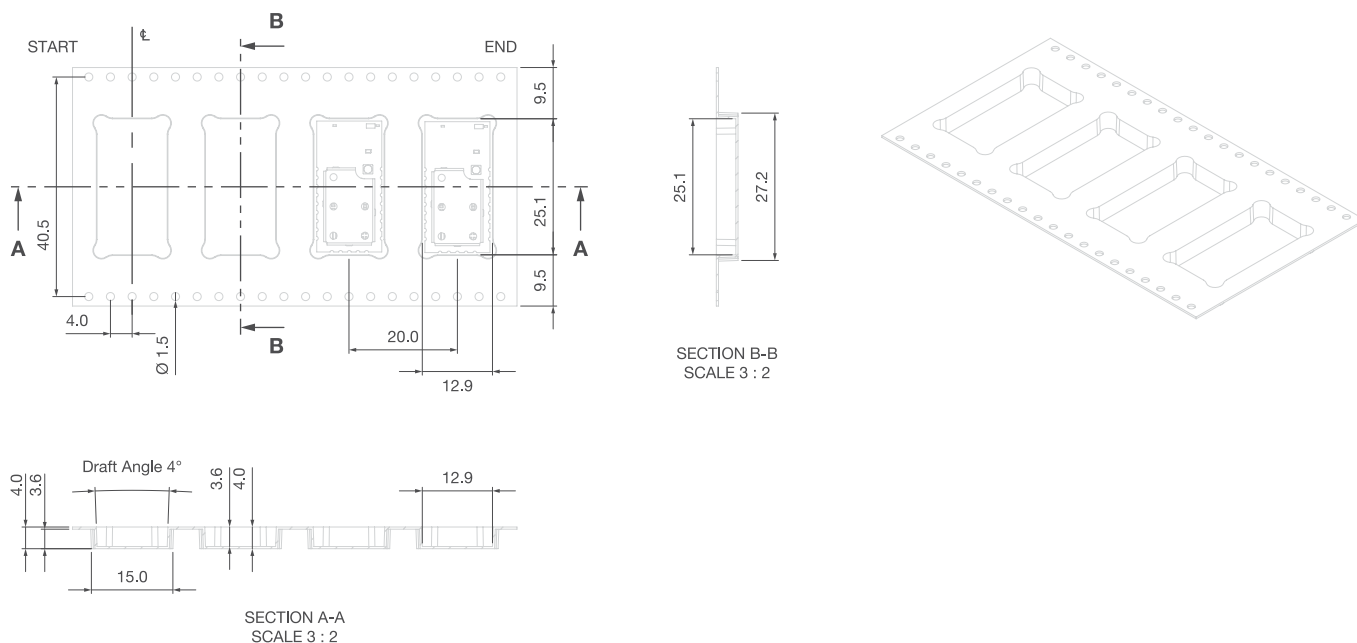

9.2. ORDERING PART NUMBERS

Order Number	Description
BLUE Bean-C	BLUE bean with connector for external antenna, packed into vacuum sealed trays.
BLUE Bean-C-TR	BLUE bean with connector for external antenna, packed into Tape & Reel
BLUE Bean-A	BLUE bean with an integrated dual-band ceramic omni-directional antenna,packed into vacuum sealed trays.
BLUE Bean-A-TR	BLUE bean with an integrated dual-band ceramic omni-directional antenna, packed into Tape & Reel
BLUE Bean-DVK	BLUE bean development kit. Comes with an integrated antenna module

10. Document Revision History

Revision	Revision Date	Description
v1.0	2022-08-22	Initial release on new format
v1.1	2022-12-21	Product drawings updated
v1.2	2023-01-10	Laminate conditions chapter added
v1.3	2023-05-29	Tape&Reel packaging information added
v1.4	2023-11-24	Ordering part numbers updated
v1.5	2024-02-16	Integration with a Motherboard information added
v1.6	2025-09-12	Ordering part numbers updated